


0.5系列选型规则/Group 0.5 Ordering Code Rules

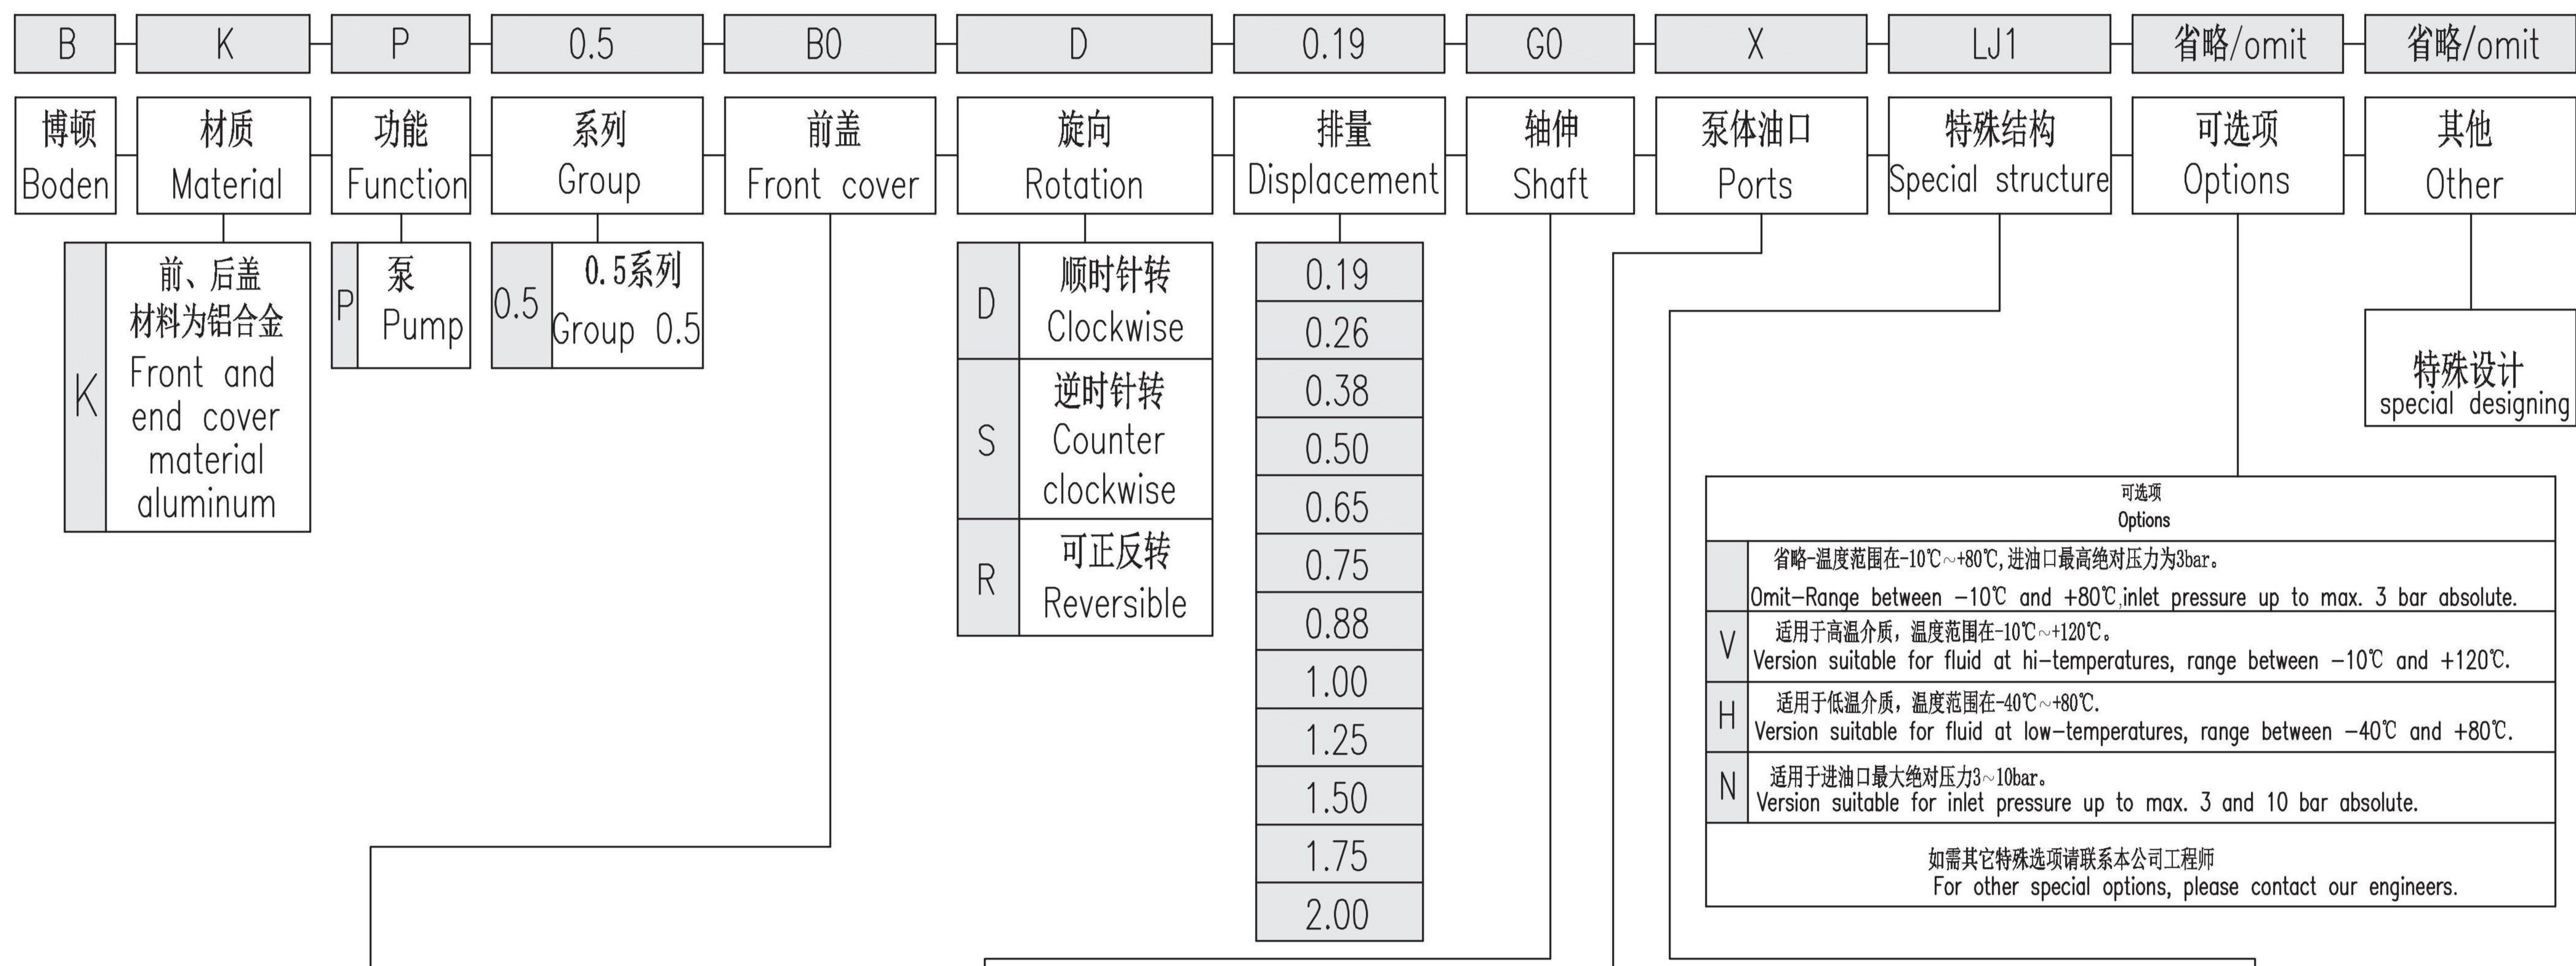

前盖 Front cover		轴伸 Shaft		泵体油口 Ports		特殊结构 Special structure	
B0	带油口方形前盖(止口φ22mm) Square front cover with oil port (centering φ22mm)	C0	带螺纹、半圆键轴 Threaded, semi-circular key shaft	Z	公制螺纹(M) Metric thread		省略-默认普通 omit-regular
B1	不带油口方形前盖(止口φ22mm) Square front cover without oil port (centering φ22mm)	G0	扁平轴 Tang shaft	L	英制管螺纹(G) Gas thread	J	后盖带进油口 Back cover with inlet
B2	带三油口方形前盖(止口φ22mm) Square front cover with 3-oil port (centering φ22mm)			U	美制管螺纹(UNF-2B) UNF thread	C	后盖带出油口 Back cover with outlet
A0	带油口菱形前盖(止口φ22mm) Diamond front cover with oil port (centering φ22mm)			R	英制锥螺纹(PT) PT thread	L	后盖带进油口 Back cover with inlet and outlet
A1	不带油口菱形前盖(止口φ22mm) Diamond front cover without oil port (centering φ22mm)			N	美制锥螺纹(NPT) NPT thread	VQ2	双向泵后盖 Bidirectional pump back cover
				X	泵体无油口 Body without ports		