
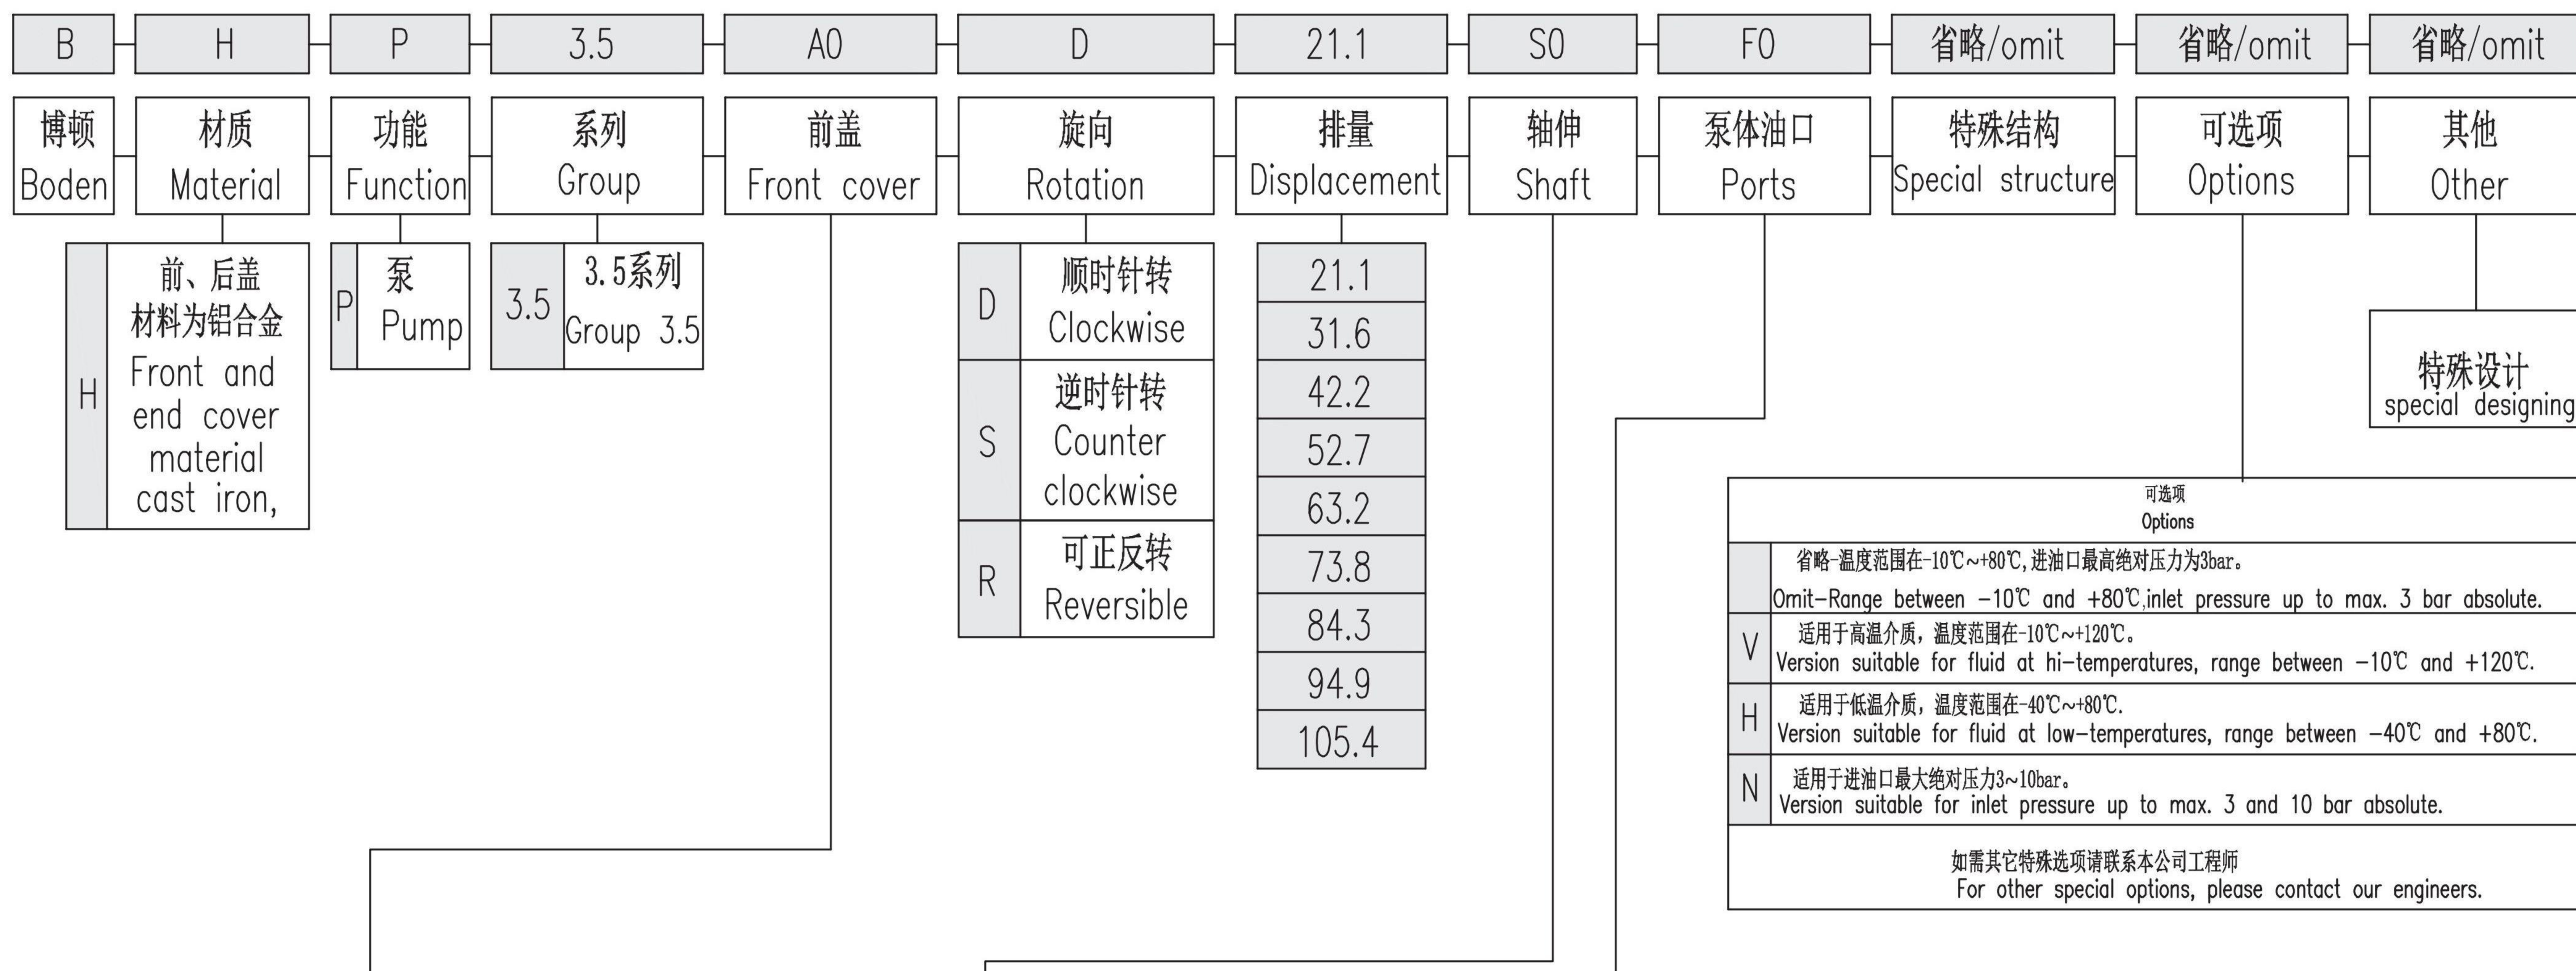
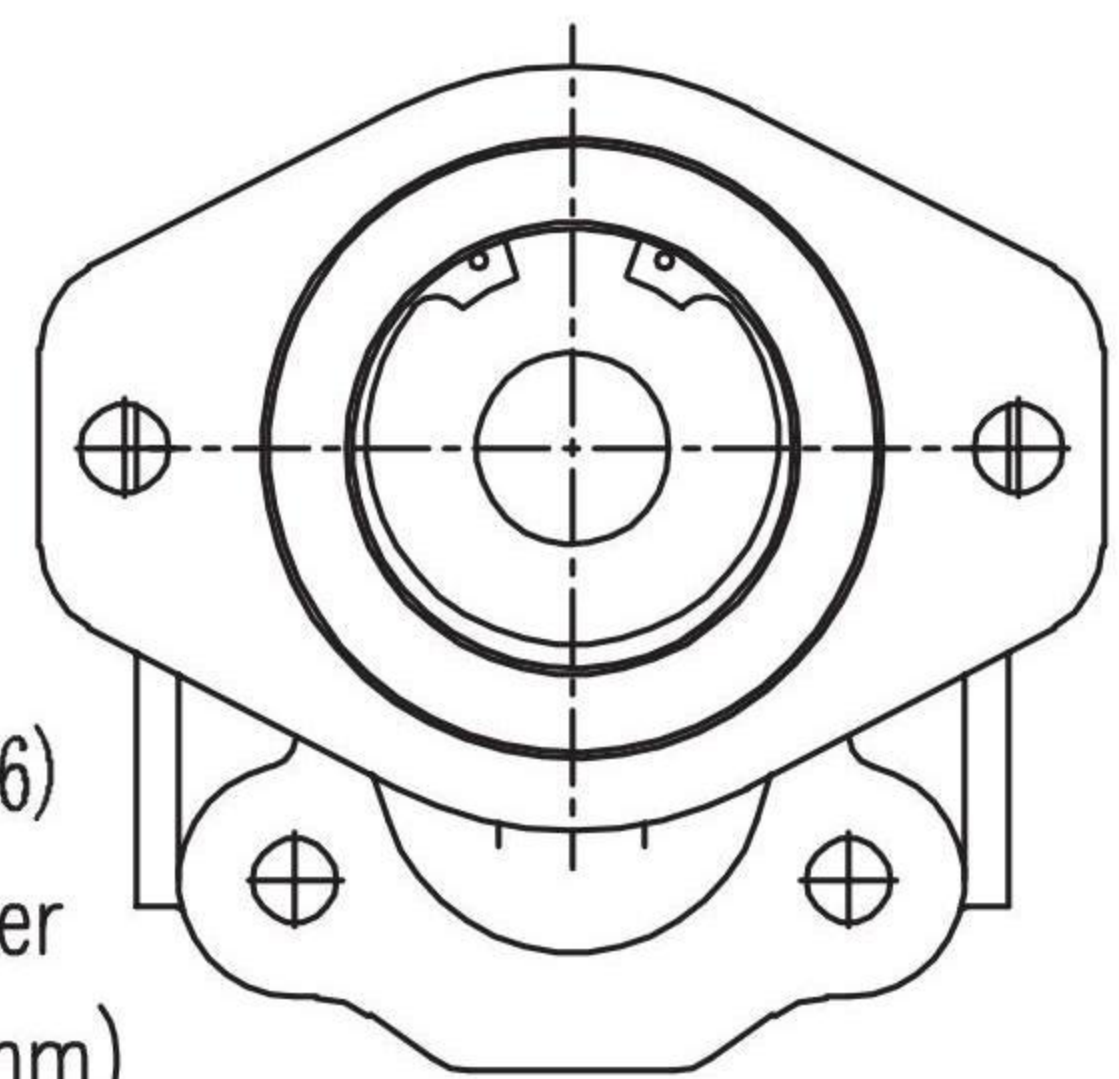
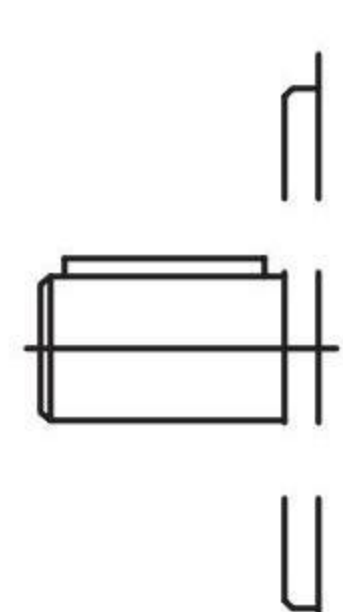
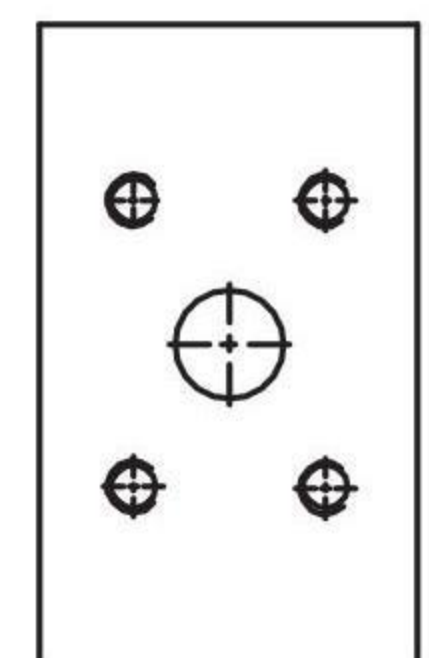
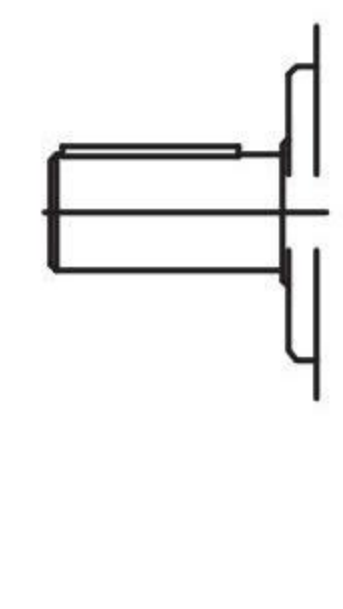
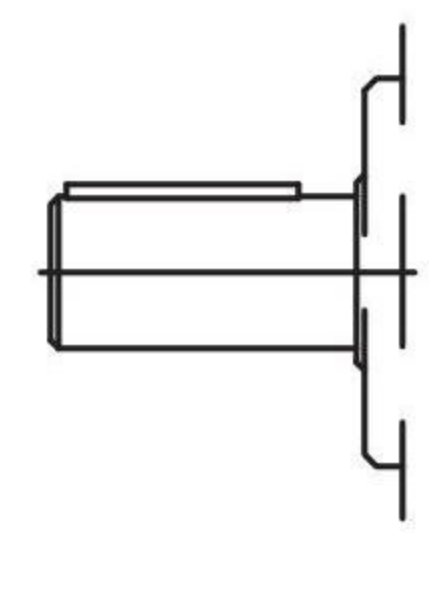
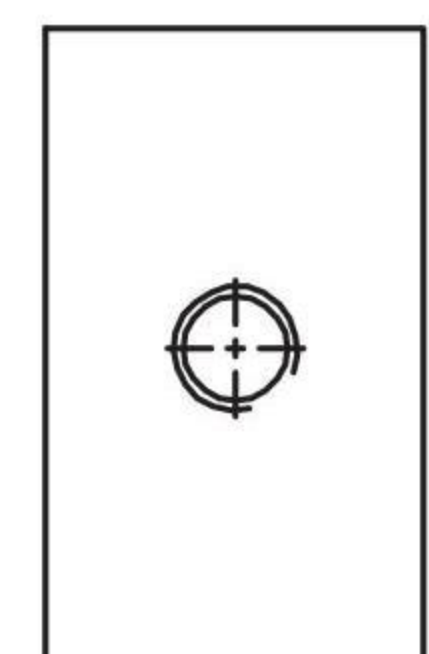
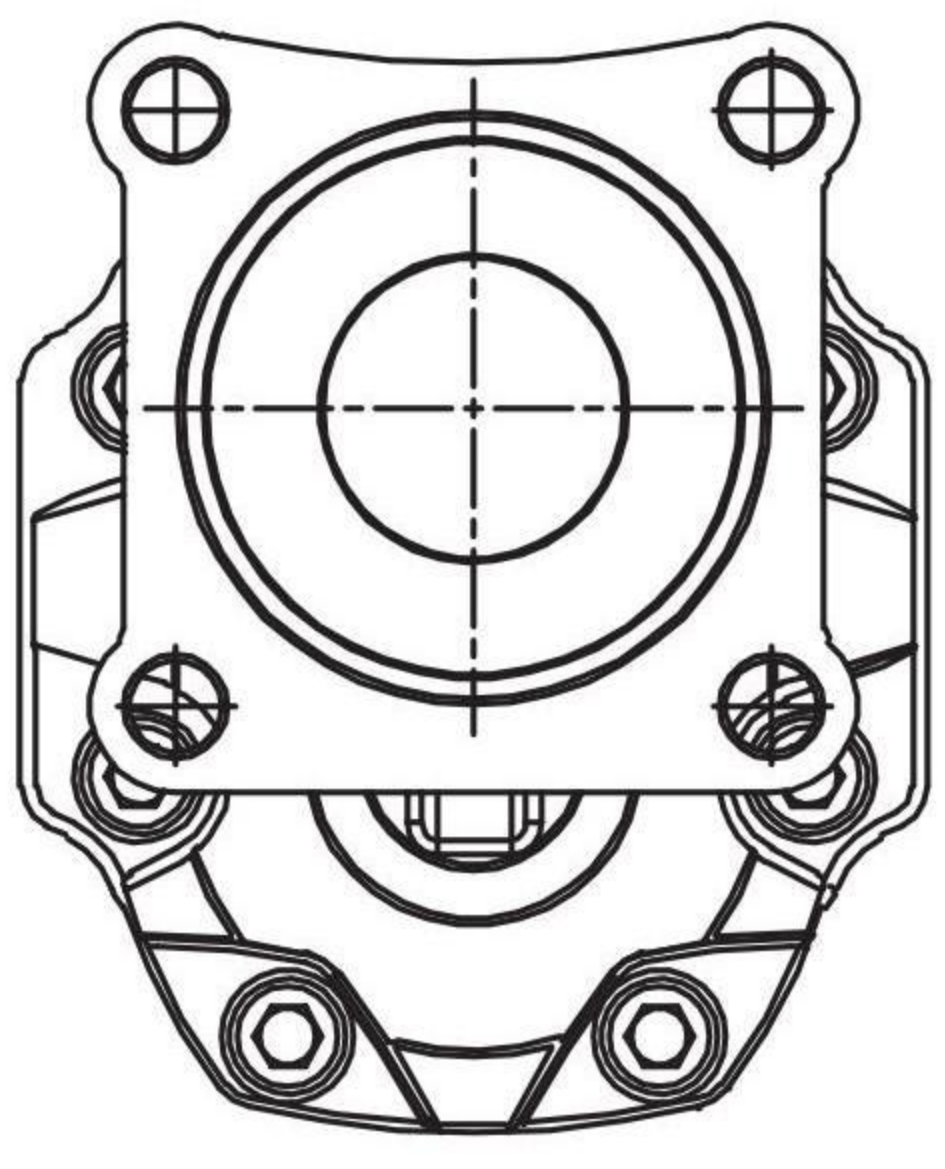
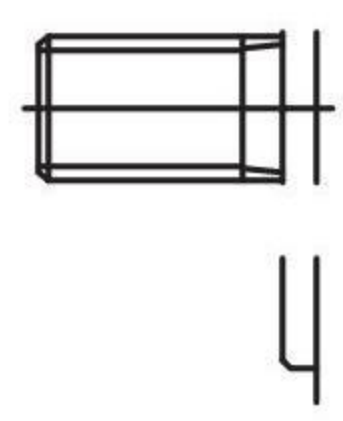
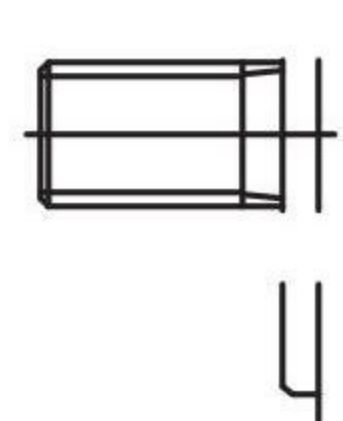


3.5系列选型规则/Group 3.5 Ordering Code Rules

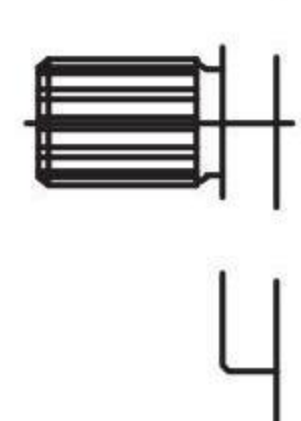

前盖 Front cover		轴伸 Shaft		泵体油口 Ports	
A0	菱形前盖(止口φ101.6) Diamond front cover (centering φ101.6mm) 	C0	平键轴 φ25.25 straight keyed φ25.25 	F	矩形法兰 Split flange 
		C1	平键轴 φ22.22 straight keyed φ22.22 		
		C2	平键轴 φ31.75 straight keyed φ31.75 	N	美制锥螺纹(NPT) NPT thread 
Q0	方形前盖(止口φ80) Square front cover (centering φ80mm) 	H0	矩形花键轴 Rectangle spline shaft 6-34x28x7 		
		H1	矩形花键轴 Rectangle spline shaft 6-32x28x8 		
		S0	SAE花键轴 SAE spline shaft DP16/32-30°-13T 		
		S1	SAE花键轴 SAE spline shaft DP12/24-30°-14T 