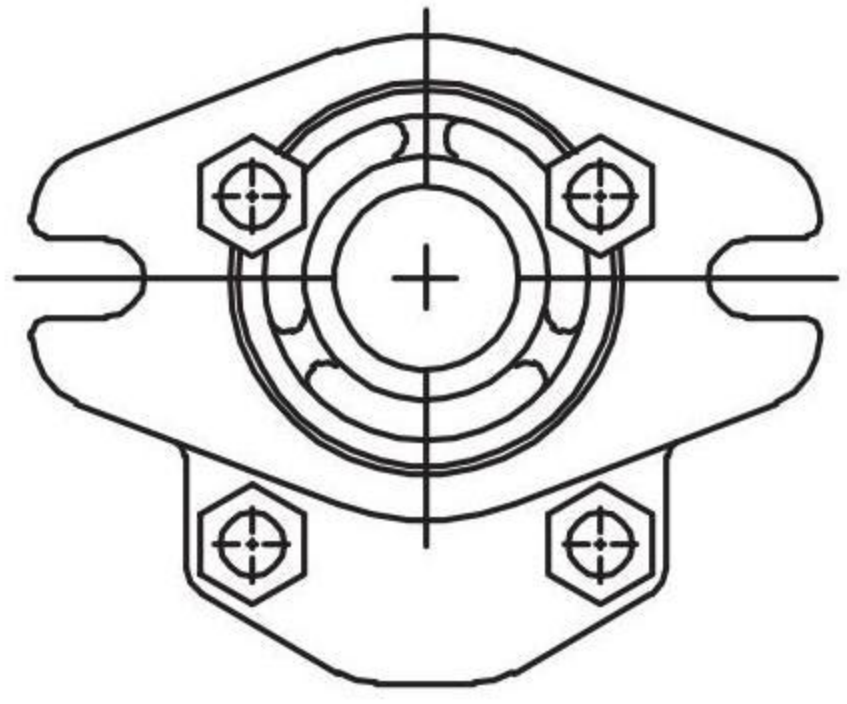
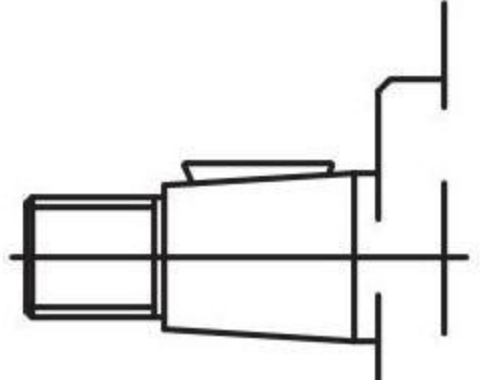
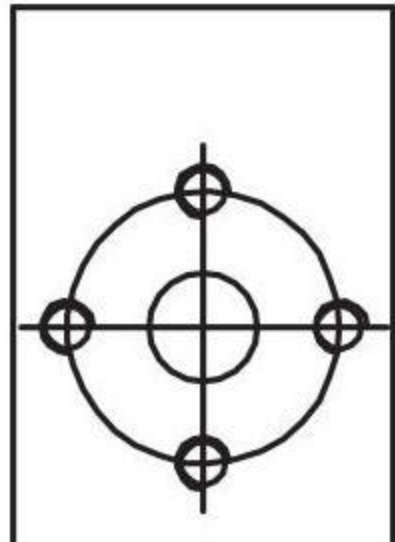
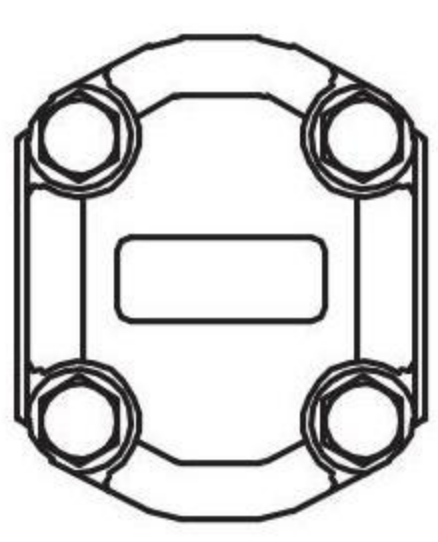
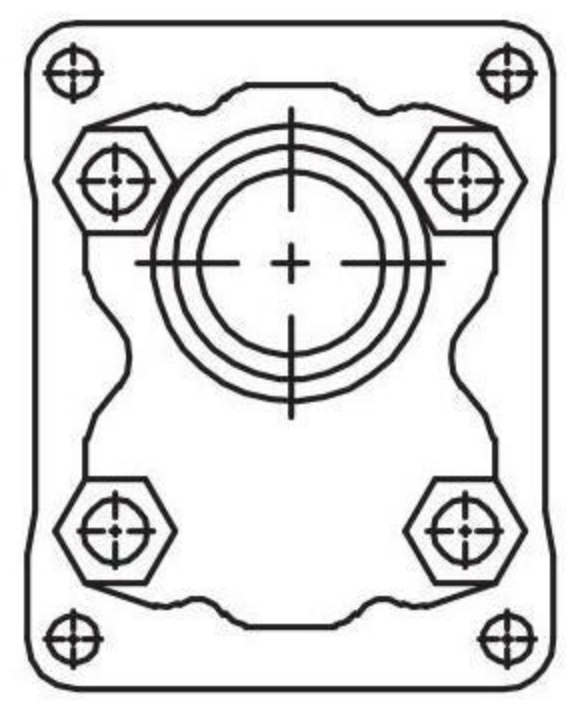
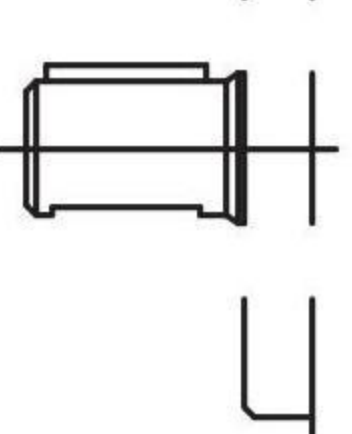
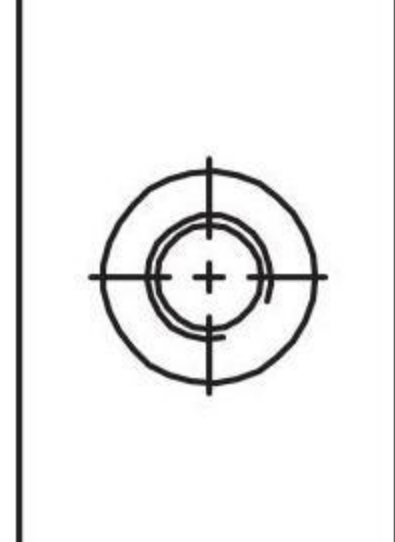
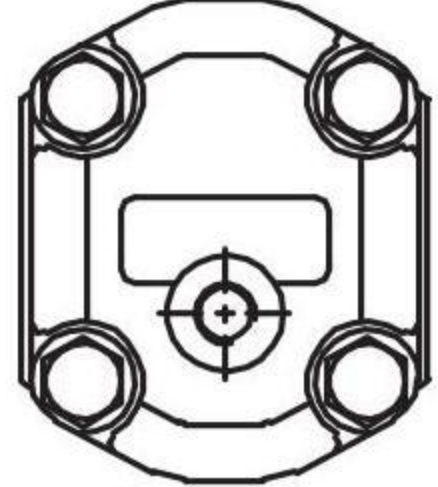
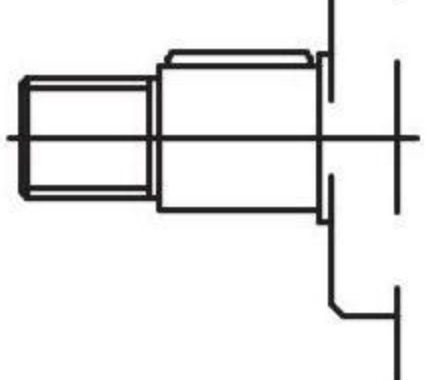
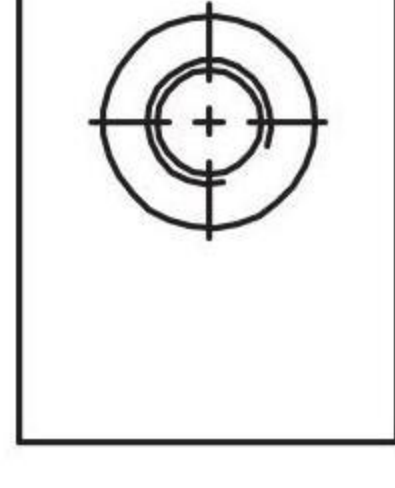

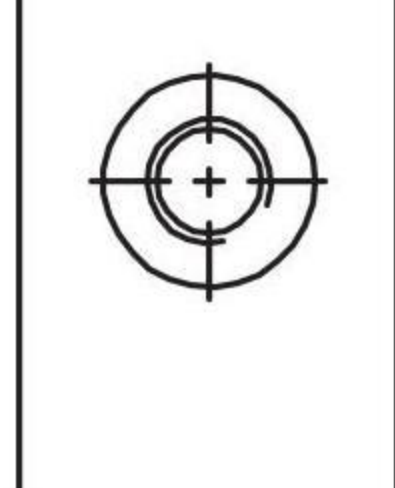
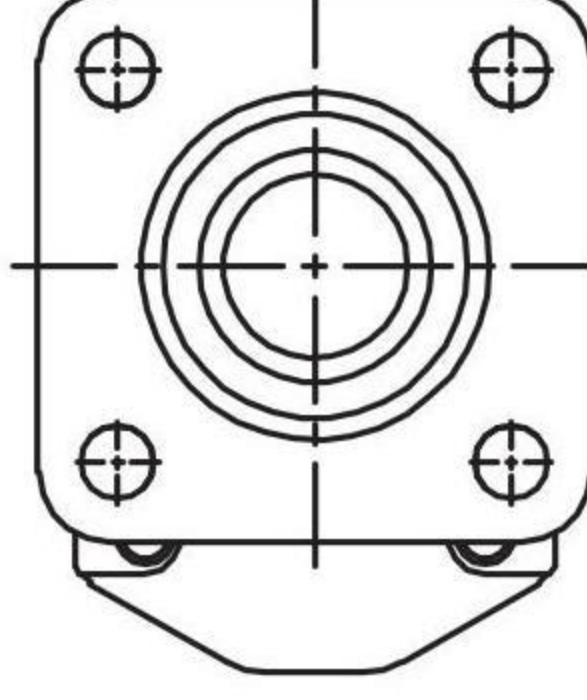
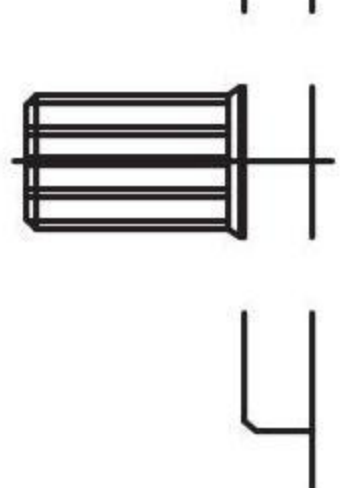
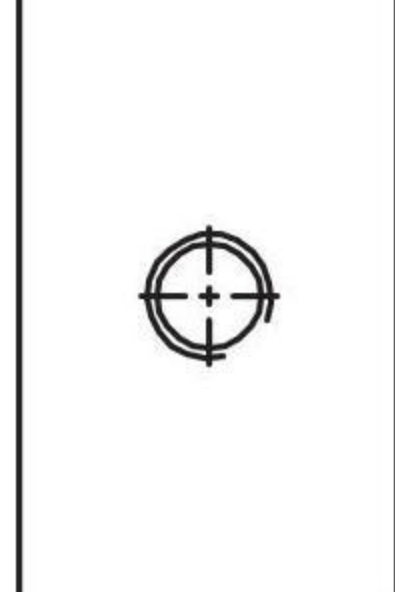
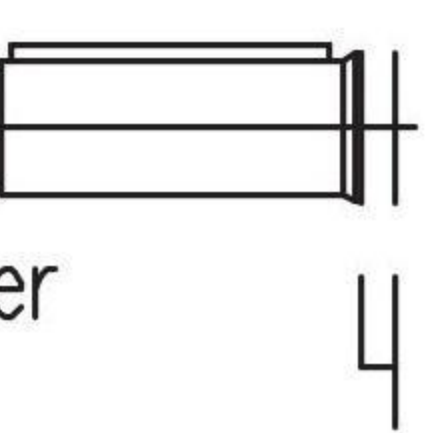
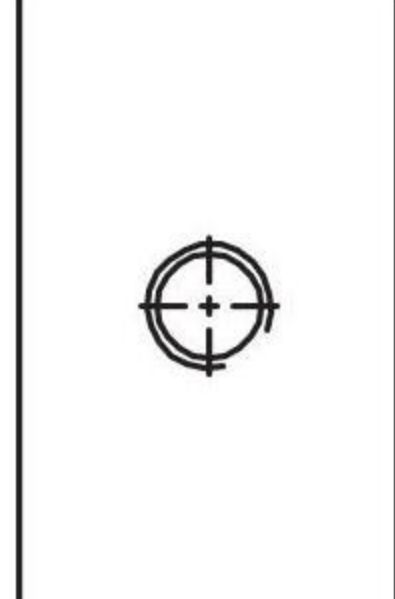
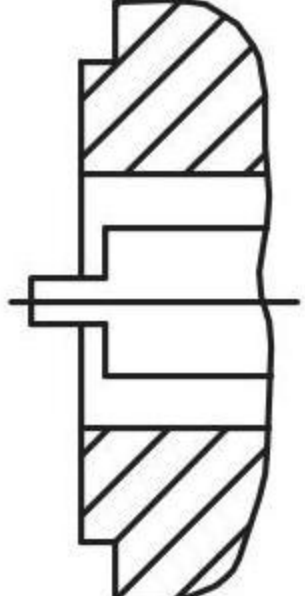
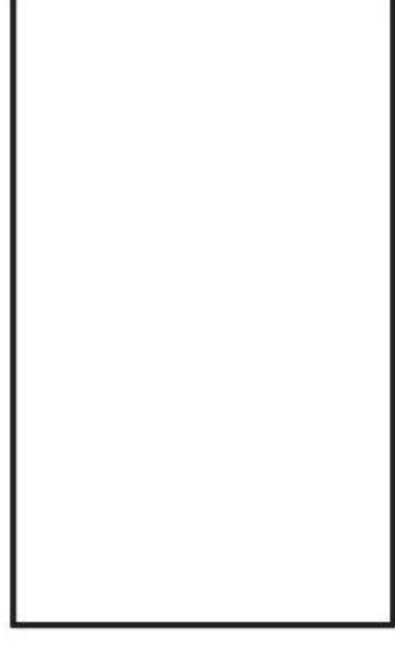
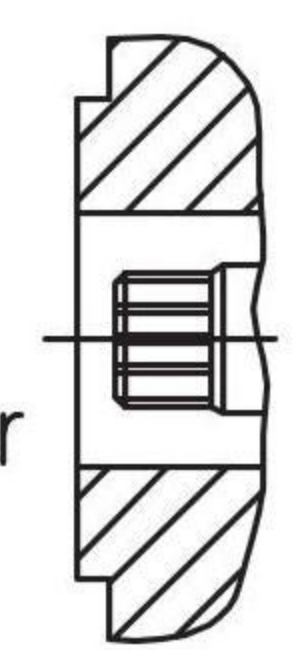


1.25系列选型规则/Group 1.25 Ordering Code Rules

B	A	P	1.25	B0	D	1.4	T0	E0	省略/omit	省略/omit	省略/omit
博顿 Boden	材质 Material	功能 Function	系列 Group	前盖 Front cover	旋向 Rotation	排量 Displacement	轴伸 Shaft	泵体油口 Ports	特殊结构 Special structure	可选项 Options	其他 Other
A	前、后盖材料为铝合金 Front and end cover material aluminum	P 泵 Pump M 马达 Motor	1.25 1.25系列 Group 1.25		D 顺时针转 Clockwise S 逆时针转 Counter clockwise R 可正反转 Reversible	1.4 2.1 2.8 3.5 4.1 5.2 6.2 7.6 9.3 11.0 13.8					特殊设计 special designing
H	前、后盖材料为铸铁，压力比铝盖高 30bar。 Front and end cover material cast iron, pressure 30 bar higher than aluminum covers									可选项 Options 省略-温度范围在-10℃~+80℃, 进油口最高绝对压力为3bar。 Omit-Range between -10℃ and +80℃, inlet pressure up to max. 3 bar absolute. V 适用于高温介质, 温度范围在-10℃~+120℃。 Version suitable for fluid at hi-temperatures, range between -10℃ and +120℃. H 适用于低温介质, 温度范围在-40℃~+80℃。 Version suitable for fluid at low-temperatures, range between -40℃ and +80℃. N 适用于进油口最大绝对压力3~10bar。 Version suitable for inlet pressure up to max. 3 and 10 bar absolute. 如需其它特殊选项请联系本公司工程师 For other special options, please contact our engineers.	

前盖 Front cover		轴伸 Shaft		泵体油口 Ports		特殊结构 Special structure	
A0	菱形前盖 (止口 φ50.8) Diamond front cover (centering φ50.8mm) 	T0	锥形键槽轴 1:8 Taper shaft 1:8 	E	矩形法兰 Rectangular flange 		省略-默认普通 omit-regular 
B0	方形前盖 (止口 φ30) Square front cover (centering φ30mm) 	C0	平键轴 Straight keyed 	Z	公制螺纹 (M) Metric thread 	Q	后盖带泄油口 Back cover with oil drain 
		C1	半圆键轴 Semi-circular key shaft 	L	英制管螺纹 (G) Gas thread 		
		G0	扁平轴 Tang shaft 	U	美制管螺纹 (UNF-2B) UNF thread 		
Q0	方形前盖 (止口 φ45.24) Square front cover (centering φ45.24mm) 	S0	SAE花键轴 SAE spline shaft DP20/40-30°-9T 	R	英制锥螺纹 (PT) PT thread 		
		C0	平键轴 Straight keyed 配Q0前盖 With Q0 front cover 	N	美制锥螺纹 (NPT) NPT thread 		
		G1	扁平轴 Tang shaft 配Q0前盖 With Q0 front cover 	X	泵体无油口 Body without ports 		
		S1	SAE花键轴 SAE spline shaft DP20/40-30°-9T 配Q0前盖 With Q0 front cover 				
	详见 65 页 See page 65 for details		详见 65 页 See page 65 for details		详见 66-67 页 See page 66-67 for details		详见 67 页 See page 67 for details